


## RCCN 日成SL型可退式尼龙铆钉 Snap Latch






单位/Unit:mm

型号 Item No.	头部 Head W1/W	孔径 Hole dia. DR/DF	整体高度 Whole height H	板厚 Board thickness T/T1
SL4.6-069	上6.2下6.3	4.3/4.6	15.6	1.1/1.5-3.7
SL4.6-068	上6.2下6.3	4.3/4.6	18.5	1.6/2.0-4.2
SL4.6-071	上6.2下6.3	4.3/4.6	20.9	3.5/2.0-4.2
SL4.6-070	上6.2下6.3	4.3/4.6	19.9	4.1/2.0-4.2
SL6.1-072	上7.2下8.5	5.9/6.2	15.7	1.1/1.5-3.7
SL6.1-073	上8.1下8.5	5.8/6.1	20.3	1.6/2.0-4.2
SL6.1-075	上7.2下8.5	6.0/6.3	18.5	4.1/2.0-4.2
SL6.1-074	上8.1下8.5	6.0/6.3	21.2	4.1/2.0-4.2
SL6.1-076	上8.1下8.5	6.0/6.3	23.0	4.1/2.0-4.2
SL7.6-078	上7.6下10.5	7.5/7.8	16.6	1.1/1.5-3.7
SL7.6-077	上15.7下10.5	7.3/7.6	26.8	1.6/2.0-4.2
SL7.6-079	上9.4下10.5	7.5/7.8	21.0	1.6/2.0-4.2
SL7.6-080	上9.4下10.5	7.5/7.8	21.8	2.5/2.0-4.2
SL7.6-082	上7.6下10.5	7.5/7.8	19.4	4.1/2.0-4.2
SL7.6-083	上9.5下10.5	7.6/7.9	23.8	4.1/2.0-4.2
SL7.6-081	上15.7下10.5	7.3/7.6	25.7	4.1/2.0-4.2
SL7.6-084	上15.7下10.5	7.4/7.7	26.8	4.1/2.0-4.2

材质:UL合格之NYLON66(黑色)防火等级94V-2,不易老化。  
用途:PC板及机板之固定,取代螺丝,不需工具即可完成装配。  
特点:容易拆卸及容易固定。  
用法:先将机板及被固定板钻孔,再将本产品塞入,即可使两板相线合。  
颜色:黑色。  
包装:1000pcs/包

Material : NYLON66 UL approved, fireproof 94V-2  
Good quality, easy to install  
Color: black  
Packing: 100pcs/bag

## RCCN 日成SG型尼龙螺座 Self-Retaining Screw Grommet

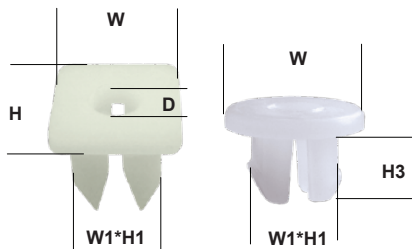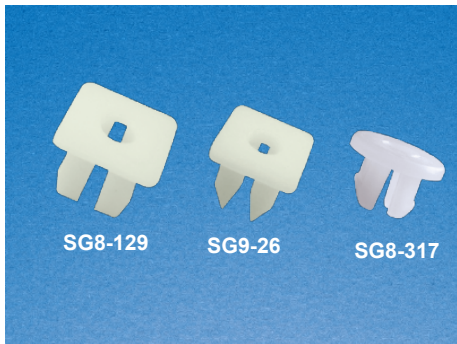

材质:UL合格之NYLON66(黑色)  
防火等级:94V-2,不易老化。  
用途:PC板及机板之固定,取代螺丝,不需工具即可完成装配。  
特点:容易拆卸及容易固定。  
用法:先将机板及被固定板钻孔,再将本产品塞入,即可使两板相线合。  
颜色:黑色。  
包装:100pcs/包  
Material : NYLON66 UL approved.  
Fireproof: 94V-2  
Good quality, easy to install  
Color: black  
Packing: 100pcs/bag

单位/Unit:mm

型号 Item No.	头部 Head W*H	孔径 Hole dia. W1*H1	长度 Length H3	螺丝孔 Screw hole D
SG9-26	12*12	8*9	10.5	#10
SG8-317	15	8.3	8.0	#14
SG7-25	9.2*9.2	7*7	6.6	#8
SG7-179	12*12	7*7.5	8.0	#6
SG9-126	14.1*14	9*9	8.0	#10
SG8-553	13.4*13.4	8*8	8.3	#12
SG7-180	10.3*10.3	7*7	8.1	#8
SG8-129	13*13	8.5*8.5	8.0	#10
SG8-130	15*13	8.5*10.5	8.0	#14
SG7-433	10.5*10.5	7.2	8.5	#6
SG8-32	16.7*16.7	8*8.5	7.9	#10
SG9-481	17	9*9	8.0	#10
SG9-1006	14.4*14.4	9*9	10.8	#10
SG9-1005	14	9.4*9.1	10.0	#10